

STT200 12t/10t

主要性能参数 Specifications


	机构 Mechanism		12t		10t		电动机 Motor kW
			m/min	t	m/min	t	
	12t	55LFV30 *	0-44 0-53 0-88	6.0 4.0 1.7	0-22 0-27 0-44	12.0 8.0 3.5	630m
		75LFV30	0-60 0-80 0-120	6.0 3.0 1.5	0-30 0-40 0-60	12.0 6.0 3.0	1030m >1030m *
	10t	37SWR25A *	0-40 0-80	5.0 2.5	0-20 0-40	10.0 5.0	500m
		45LFV25	0-40 0-48 0-80	5.0 4.0 1.5	0-20 0-24 0-40	10.0 8.0 3.0	500m
		55LFV25	0-45 0-54 0-90	5.0 4.0 1.5	0-22.5 0-27 0-40	10.0 8.0 3.0	1090m >1090m *
	12t	DTC120	0-57 m/min				120 N·m
	10t	DTC95A	0-57 m/min				95 N·m
		RTC240	0-0.7 rpm				2x120 N·m
		RT	12.5-25 m/min				4x2.6/5.2

电压 Pressure	kVA
380V (±10%) 50 Hz	37SRW25A : 65 45LFV25 : 75 55LFV25, 55LFV30 : 90 75LFV30 : 115

* 同型号有变型 Contact us, please.
★ 标准配置 Standard configuration.

永茂建机
YONGMAO

STT200
12t/10t

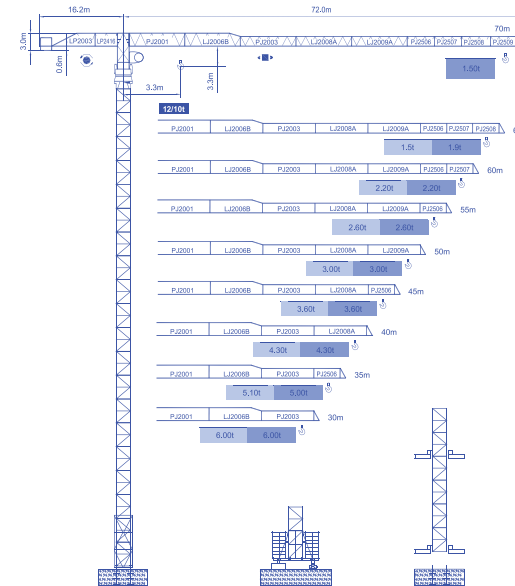

EN14439 FEM1005 C/25

本规格参数不能代替设计。规格书仅供参考。如有任何技术信息，请参考相应的设计。
These specifications and data are not legally binding. For any technical information, please refer to corresponding instructions.

辽宁省抚顺市顺城区前岭永茂工业园 111326 YONGMAO Industrial Park, Shuncheng, Fushun Liaoning, China. 平头系列 Topless
Tel: 024-57648899 Fax: 024-57649999 Email: sun@yongmao.com.cn web: www.yongmao.com.cn V 5.0-03132020



EN14439 FEM1005 C/25

平头系列 Topless
V 5.0-03132020

office@sky-line.co.il 03-9033901 סניף
www.sky-line.co.il 44820 ברקן ת.ד. 143




YONGMAO HOLDINGS LIMITED





載荷表 Load Chart


P-12-A(B)-1-W1.0													
R (m)	吊車 F-H	R (C _{max}) (m)	C _{max} (t)	15	20	25	30	35	40	45	50	55	60
12t	U	11.92	12.00	9.07	6.35	4.76	3.72	2.99	2.45	2.02	1.69	1.42	1.19
	L	21.04	6.00	6.00	6.00	4.92	3.97	3.31	2.81	2.43	2.13	1.88	1.67
65	U	14.18	12.00	11.22	7.93	6.01	4.76	3.87	3.22	2.71	2.30	1.97	1.70
	L	25.78	6.00	6.00	6.00	6.00	6.05	4.22	3.61	3.14	2.76	2.45	2.20
60	U	14.69	12.00	11.71	8.29	6.30	4.99	4.07	3.39	2.86	2.44	2.10	
	L	26.98	6.00	6.00	6.00	6.00	6.32	4.45	3.81	3.32	2.92	2.60	
55	U	14.90	12.00	11.91	8.43	6.41	5.09	4.16	3.46	2.93	2.50		
	L	27.57	6.00	6.00	6.00	6.00	6.45	4.57	3.91	3.40	3.00		
50	U	15.47	12.00	12.00	8.83	6.73	5.35	4.38	3.66	3.10			
	L	28.89	6.00	6.00	6.00	6.00	6.75	4.82	4.13	3.60			
45	U	15.89	12.00	12.00	9.13	6.96	5.54	4.54	3.80				
	L	29.88	6.00	6.00	6.00	6.00	6.97	5.01	4.29				
40	U	16.33	12.00	12.00	9.23	7.04	5.61	4.60					
	L	30.33	6.00	6.00	6.00	6.00	6.00	5.10					
35	U	16.88	12.00	12.00	9.82	7.51	6.00						
	L	30.00	6.00	6.00	6.00	6.00	6.00	6.00					



P-10-A(B)-1-W1.0													
R (m)	吊車 F-H	R (C _{max}) (m)	C _{max} (t)	15	20	25	30	35	40	45	50	55	60
10t	U	14.84	10.00	9.87	6.94	5.23	4.11	3.32	2.73	2.28	1.92	1.63	1.39
	L	27.30	5.00	5.00	5.00	5.00	4.47	3.72	3.16	2.72	2.38	2.10	1.87
70	U	16.12	10.00	10.00	7.89	5.83	4.60	3.74	3.10	2.61	2.21	1.89	1.62
	L	29.26	5.00	5.00	5.00	5.00	4.88	4.06	3.47	3.01	2.65	2.35	2.11
65	U	16.51	10.00	10.00	7.93	6.01	4.76	3.87	3.22	2.71	2.30	1.97	1.70
	L	30.24	5.00	5.00	5.00	5.00	4.22	3.61	3.14	2.76	2.45	2.20	
60	U	17.45	10.00	10.00	8.49	6.45	5.12	4.18	3.49	2.95	2.52	2.17	
	L	31.66	5.00	5.00	5.00	5.00	4.45	3.81	3.32	2.92	2.60		
55	U	17.67	10.00	10.00	8.62	6.56	5.21	4.26	3.55	3.00	2.57		
	L	32.35	5.00	5.00	5.00	5.00	4.57	3.91	3.40	3.00			
50	U	18.32	10.00	10.00	9.00	6.86	5.46	4.47	3.74	3.17			
	L	33.81	5.00	5.00	5.00	5.00	4.82	4.13	3.60				
45	U	18.77	10.00	10.00	9.27	7.07	5.64	4.62	3.87				
	L	35.08	5.00	5.00	5.00	5.00	5.00	5.00	4.30				
40	U	18.91	10.00	10.00	9.35	7.14	5.69	4.67					
	L	35.00	5.00	5.00	5.00	5.00	5.00	5.00	5.00				
35	U	19.71	10.00	10.00	9.83	7.51	6.00						
	L	30.00	5.00	5.00	5.00	5.00	5.00	5.00					

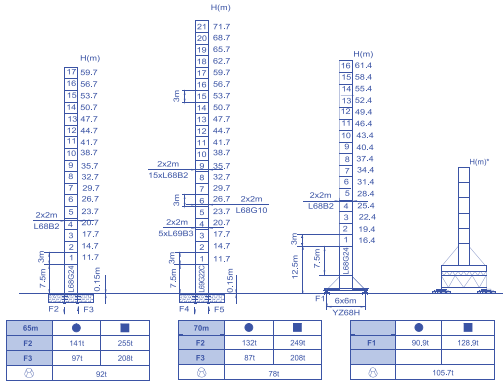

● 工作狀態支反力 In service reaction ■ 非工作狀態支反力 Out of service reaction
⊕ 整機自由高度重量 (不含平衡重及配重重量) Total weight of free standing crane (excludes counter weight & ballast)

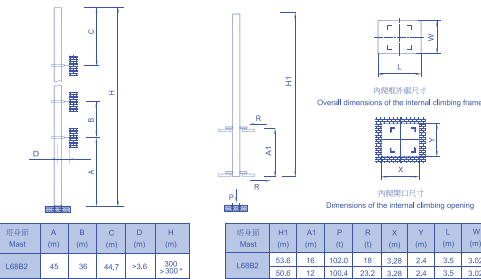

附著節數 Number of tie collars = (H-A-C)/B+1

超過100m高度，實際應減荷，請與公司聯繫。

Load should be reduced when the height exceeds 100m. Please contact Yongmao for details.

EN 14439 FEM1005 C/25

 YONGMAO HOLDINGS LIMITED

EN 14439 FEM1005 C/25

STT200 12t/10t

 YONGMAO HOLDINGS LIMITED