


TOPKIT H3/36 B




TOPKIT H3/36 B

Potain

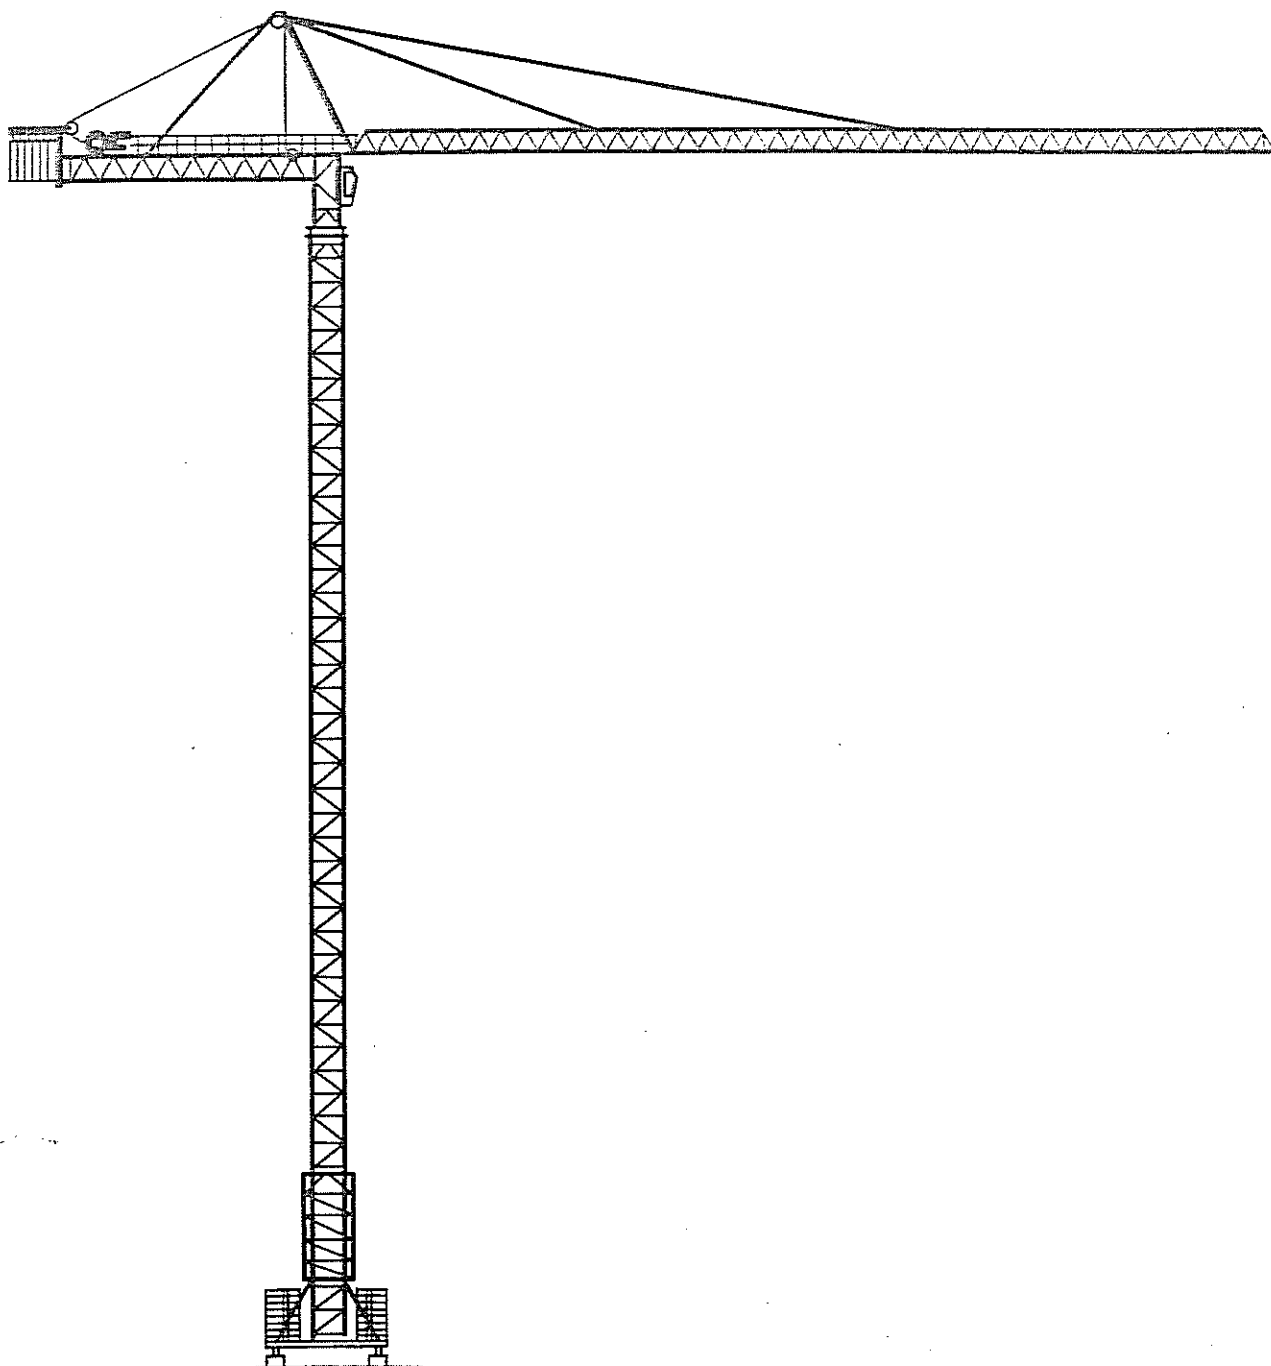

Potain TOPKIT H3/36 B

Cotes *Abmessungen* Dimensions *Dimensiones*

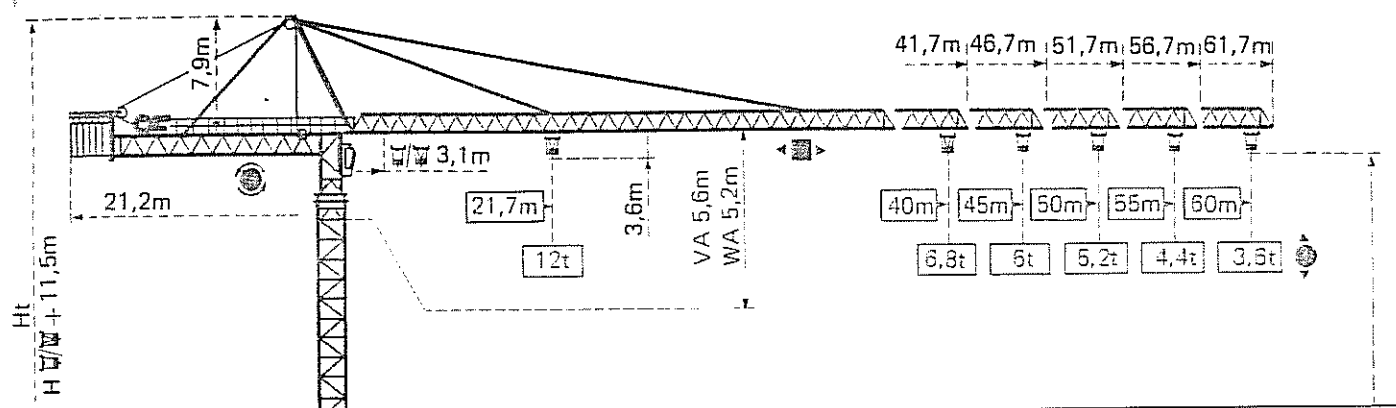

Mature Mast Mast Mástil

☒ 2m x 2m

PA 654

VA 654

Mâture Mast Mast Mástil





2,15 m x 2,15 m

PA 752

VA 753

WA 750

$$H_{\text{H}} = H_{\text{H}} + 0,7\text{m}$$

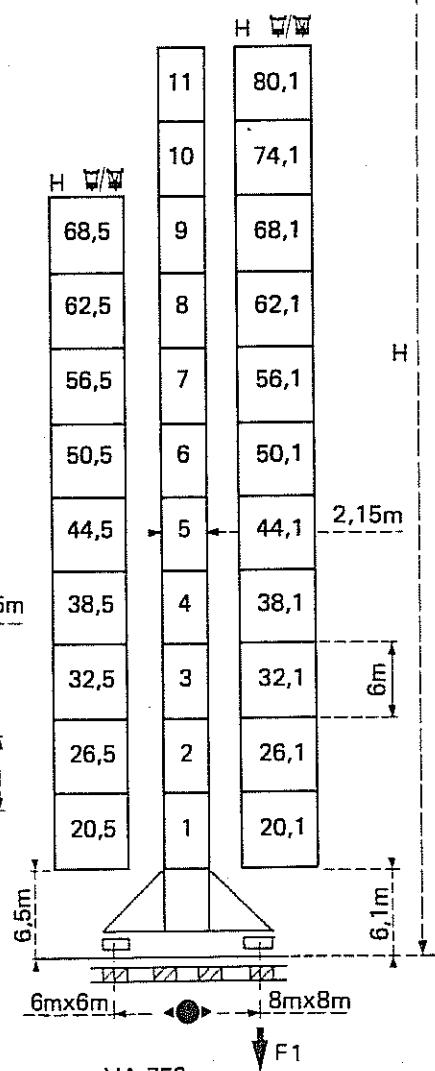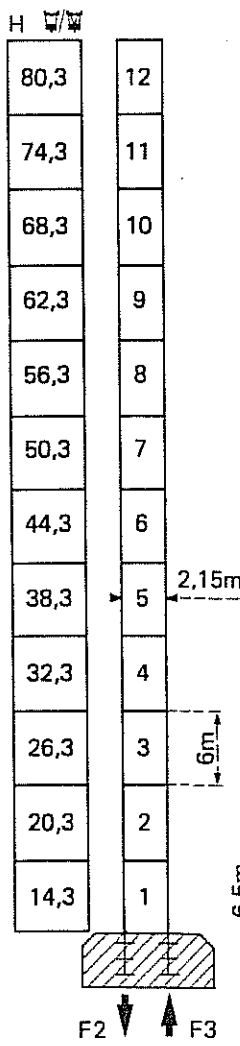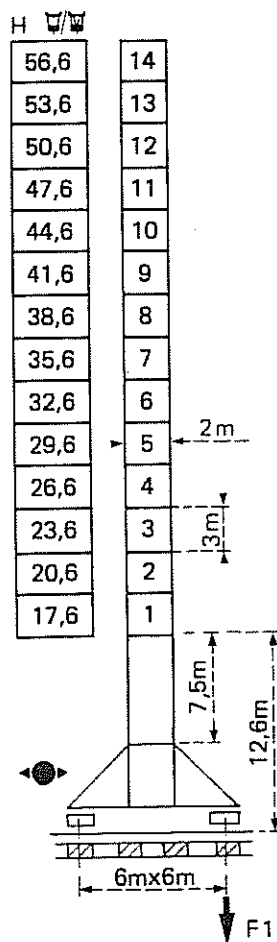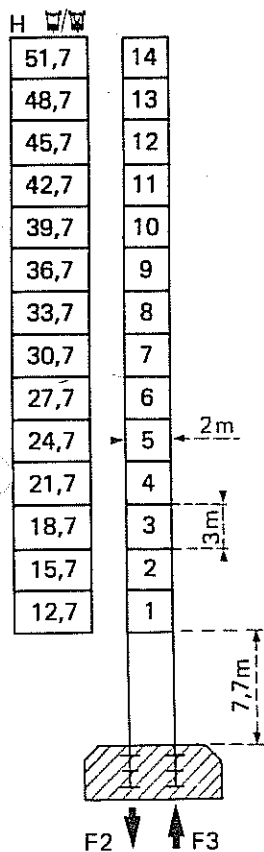

F = Réactions *Eckdrücke* Reactions *Reacciones*

F2	● 135 t	■ 140 t
F3	● 88 t	■ 94 t
	77,5 t	

F1	● 85 t	■ 95 t
	93 t	











F2	● 158 t	■ 193 t
F3	● 98 t	■ 136 t
	102,5 t	

VA 753		
F1	● 95 t	■ 97 t
	109 t	

WA 750		
F1	● 92 t	■ 102 t
	118 t	

Courbes de charges Lastkurven Load curves Curvas de cargas

 Flèche Ausleger Jib Flecha



 Chariot standard 2/4 brins.
(En cas d'utilisation  déduire
0,2 t aux charges ).
 Chariot optionnel 2 brins
uniquement.


 Standardlaufkatze 2/4 Strän-
ge. (Bei Einsatz von  ist 0,2 t
der Lasten von  abzuzie-
len.)
 Laufkatze in Sonderaus-
rüstung mit nur 2 Strängen.

 Standard trolley 2/4 fall.
(When using  subtract 0,2 t
from the loads ).
 Optional trolley 2 fall only.

 Carro standard 2/4 ramales.
(En caso de utilización  quit-
ar 0,2 t de las cargas ).
 Carro opcional en 2 ramales
solamente.

Implantations spéciales Einsatzmöglichkeiten Special mounting possibilities Instalaciones especiales

Nous consulter
Auf Anfrage
Consult us
Consultarnos

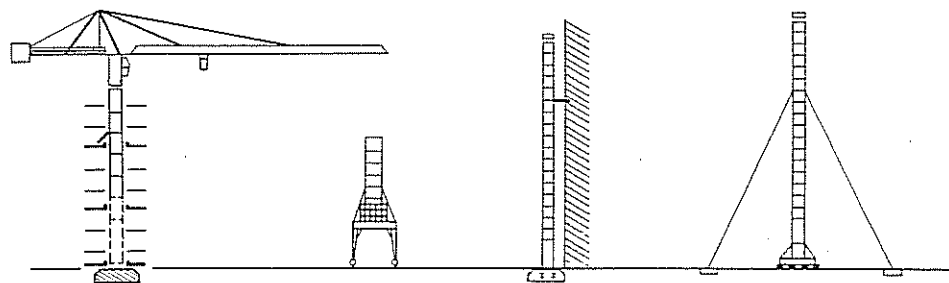

H > H maxi : nous
consulter

- En service
- Hors service

 A vide sans lest avec
flèche et hauteur maximum.

H > H maxi : Auf
Anfrage

- In Betrieb
- Ausser Betrieb

 Ohne Last und Ballast
mit Maximalausleger und
Maximalhöhe.

H > H maxi : consult us

- In service
- Out of service

 Without load and ballast
with longest jib and maxi-
mum height.

H > H máxi : Consultarnos

- En servicio
- Fuera de servicio

 Sin cargas, sin lastre con
flecha y altura máxima.

Mécanismes Antriebe Mechanisms Mecanismos

					m/min	t		ch-PS hp	kW
Levage Heben Hoisting Elevación	Treuil standard Standardhubwerk Standard hoist winch Mecanismo standard	55 RCS 30 			0 - 34	6	maxi 365m	55	40,5
					0 - 68	3			
					0 - 17	12			
					0 - 34	6			
	Treuil optionnel Wahlweises Hubwerk Optional winch Mecanismo opcional	120 LMD 30 S 			0 → 65	6	maxi 621m	120	88,3
					0 → 130	3			
					0 → 260	1,5			
					0 → 32,5	12			
					0 → 65	6			
					0 → 130	3			
Distribution - Katzfahren Trolleying - Distribución			6 DPC 4		0 - 60 7,5 → 30			3 - 6	2,2 - 4,4
Orientation - Schwenken Slewing - Orientación			OMD 85		0 → 0,9 tr/min U/min-rpm			2 x 12	2 x 8,8
Translation Kranfahren Travelling Traslación	▲ Standard Standard Standard Standard	VA 654  R ≥ 12m	▲	RT 443 A1 2 V	15 - 30			4 x 5	4 x 3,7
			▲▲	RT 426 C1	16			2 x 6,5	2 x 4,8
			▲▲▲	RC 646 AR H ≤ 41,6m	10 - 50			4 x 6,8	4 x 5
	▲▲ Changement de poste Umsetzen Repositioning Cambio de sitio	VA 753  R ≥ 12m	▲	RT 544 A1 2 V	13,5 - 27			4 x 7	4 x 5,2
			▲▲	RT 544 A1	13,5			4 x 4	4 x 3
			▲▲▲	RC 646 AR H ≤ 38,5m	10 - 50			4 x 7	4 x 5
	▲▲▲ Rapide Schnell Fast Rápida	WA 750  R ≥ 16m	▲	RT 544 A1 2 V	13,5 - 27			4 x 7	4 x 5,2
			▲▲	RT 544 A1	13,5			4 x 4	4 x 3
			▲▲▲	RC 646 AR H ≤ 38,1m	10 - 50			4 x 7	4 x 5
Puissance électrique nécessaire Anschlusswert Necessary electric power Potencia electrica necesaria		380 V 50 HZ 	Réseau - Netzstrom - Mains supply - Red					RCS : 75 kVA LMD: 160 kVA	
			Groupe électrogène - Stromaggregat Generator set - Grupo electrogeno					Nous consulter Auf Anfrage Consult us Consultarnos	

Potain

18, rue de Charbonnières B.P 173 - F 69130 ECULLY
Tél. (7) 833.81.81 - Télex 330 179

EXPORT, 89 Av. du Pdt Roosevelt - CHEVILLY - LARUE
F 94150 RUNGIS - Tél. (1) 687.22.23 - Télex 270001

POTAIN GmbH - D 6082 MÖRFELDEN - WALLDORF
Vordendstr. 79-87 - Postfach 420 - Tel. (6 105) 5091 - Telex 4 185745

POTAIN SUISSE S.A. - CH 5115 MÖRIKEN WILDEGG
Tel. 64.53.19.91 - Telex 68294