

GRUA TORRE TOWER CRANE


J56MAC

De acuerdo con UNE 58-101-92 FEM 1001-87 According to

Directivas de nivel de potencia acústica / Sound power level directives
84/534/CEE & 87/405/CEE
Directivas de máquinas / Machinery directives
89/392/CEE & 91/368/CEE

SISTEMA DE CALIDAD CERTIFICADO SEGUN
QUALITY ASSURANCE SYSTEM CERTIFIED ACCORDING TO

UNE-EN-ISO 9001

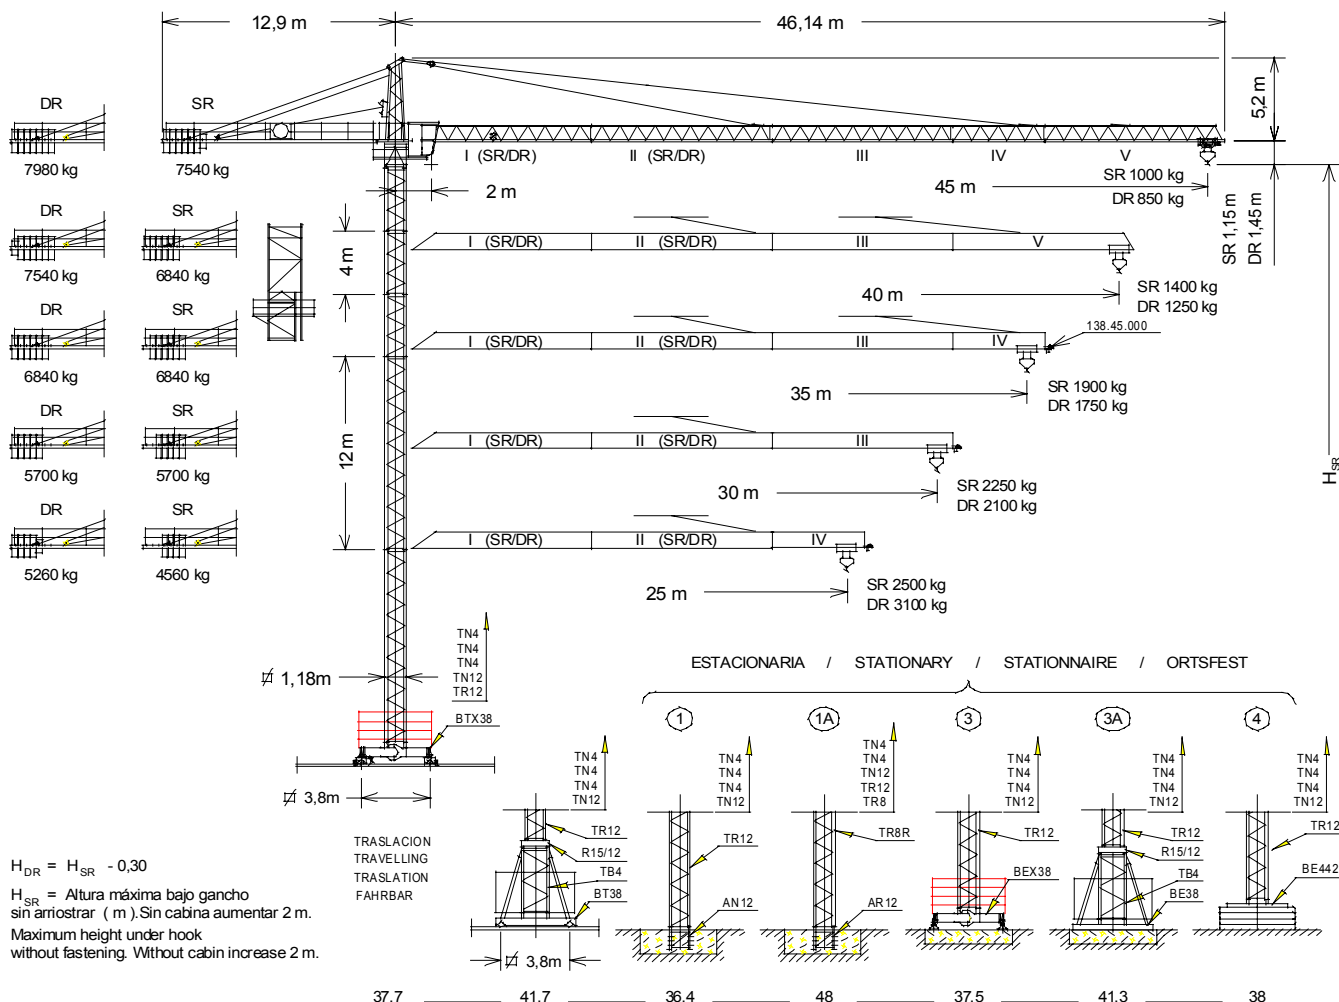

$$H_{DR} = H_{SR} - 0,30$$

H_{SR} = Altura máxima bajo gancho
sin arristrar (m). Sin cabina aumentar 2 m.
Maximum height under hook
without fastening. Without cabin increase 2 m.

CARACTERISTICAS DE MECANISMOS MECHANISMS FEATURES			CARACTERISTIQUES DES MECANISMES KENNDATEN DER ANTRIEBE		
MECANISMOS MECHANISMS MECANISMES ANTRIEBE					
	EJ 2570		TGJ 725 TGJ 725 M	OJR 708	TCL 460
kW	18,4		5,5	5,5	3
VELOCIDADES SPEEDS VITESSES GESCHWINDIGKEITEN	SR 1250 kg 2500 kg DR 2500 kg 5000 kg	70/35/8,8 m/min 35/8,8 m/min 35/17,5/4,4 m/min 17,5/4,4 m/min	25 m/min	0...0,8 r.p.m. sl./min tr./min	60/30 m/min
Max. recorrido gancho Maximum hook course Course maximale du crochet Max. Hakenweg	SR : 170 m DR : 85 m		⚡ 380V - 50Hz	Potencia necesaria Required power Puissance nécessaire Erforderliche Leistung	32,4 kW





JASO EQUIPOS DE OBRAS, S.A.

Fecha / Date: 23-09-02 - Reservado el derecho a modificaciones sin previo aviso / Subject to modification, without previous warning

SR	(kg)	Alcance del gancho (m) Hook reach (m)					Portée du crochet (m) Hakenbereich (m)			2500 kg a
		45	40	35	32	30	27	25	22	
PLUMA JIB FLECHE AUSLEGER	45 m	1000	1150	1345	1485	1600	1800	1960	2255	20 m
	40 m	—	1400	1630	1800	1935	2170	2360	2500	23,7 m
	35 m	—	—	1900	2095	2250	2500	2500	2500	27,22 m
	30 m	—	—	—	—	2250	2500	2500	2500	27,22 m
	25 m	—	—	—	—	—	—	2500	2500	25 m

DR	(kg)	Alcance del gancho (m) Hook reach (m)					Portée du crochet (m) Hakenbereich (m)			5000 kg a
		45	40	35	30	25	20	15	12	
PLUMA JIB FLECHE AUSLEGER	45 m	850	1000	1195	1450	1810	2350	3250	4150	10,1 m
	40 m	—	1250	1480	1785	2210	2850	3915	4985	11,96 m
	35 m	—	—	1750	2100	2590	3325	4550	5000	13,74 m
	30 m	—	—	—	2100	2590	3325	4550	5000	13,74 m
	25 m	—	—	—	—	3100	3960	5000	5000	16,12 m

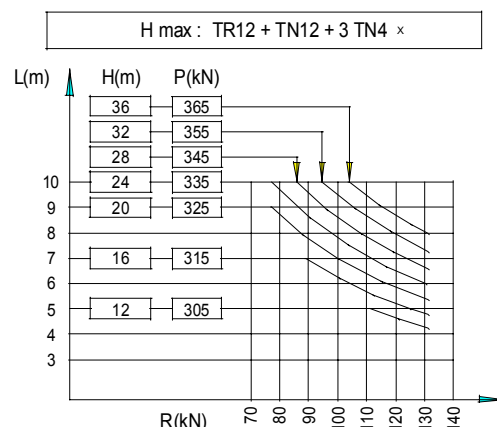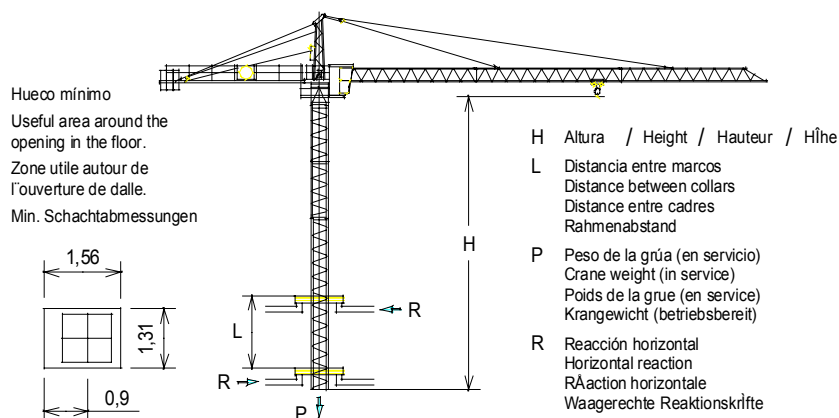

LASTRES INFERIORES LOWER BALLASTS

Composición torre Composition tour	Tower composition Turmaufbau	1TN12	2TN4/1TN12	3TN4/1TN12	1TN4/1TN12/1TR12	3TN4/1TN12/1TR12	3TN4/1TN12/1TR12/1TB4
		2TN4/1TB4	1TN4/1TN12/1TB4	2TN4/1TN12/1TB4	3TN4/1TN12/1TB4	2TN4/1TN12/1TR12/1TB4	
Altura bajo gancho (m) Hauteur sous crochet (m)	Height under hook (m) Hakenhöhe (m)	13,7	21,7	25,7	29,7	37,7	41,7
Lastre base (kg) Base ballast (kg) Lest de base (kg) Unterer Ballast (kg)	BTX38	24600	32800	32800	41000	49200	-----
	BEX38						
	BT38	24000	32000	32000	40000	48000	52000
	BE38						

LESTES INFERIEURS UNTERER BALLAST



JASO EQUIPOS DE OBRAS, S.A.

Ctra./Rd. Madrid - Irún Km. 415
20.213 IDIAZABAL (Gipuzkoa)
ESPAÑA / SPAIN
P.O. Box, 23 - 20.200 BEASAIN

Tel. +34 943 - 18 70 00
Fax. +34 943 - 18 70 20
E-mail: jaso@jaso.com
http://www.jaso.com

Fecha / Date: 23-09-02

Reservado el derecho a modificaciones sin previo aviso / Subject to modification, without previous warning

DELEGACION / DELEGATION